

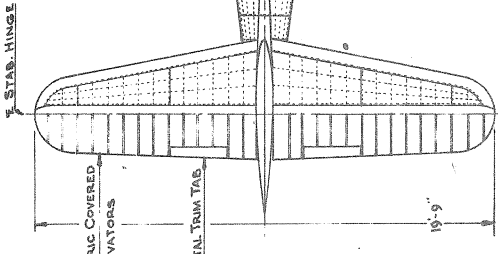
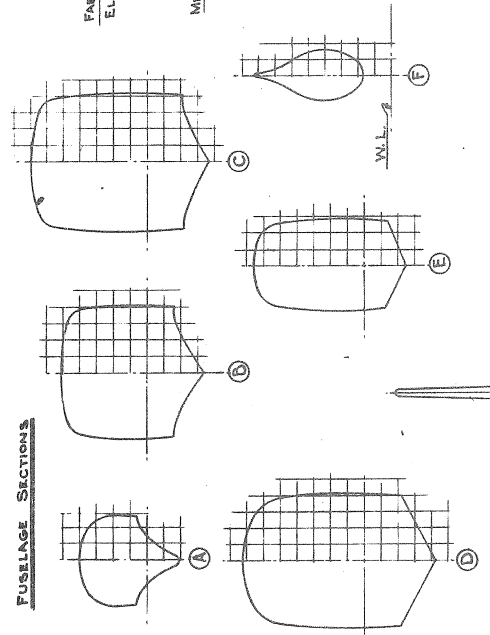


FUSELAGE SECTIONS

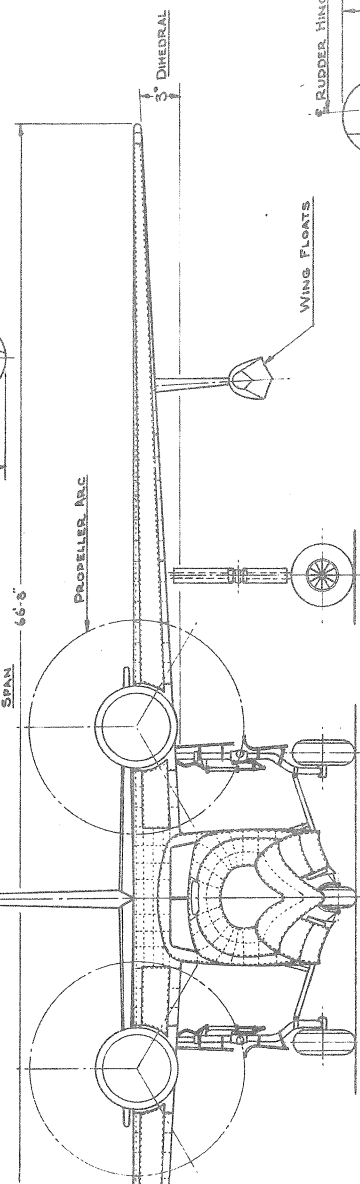


SPECIFICATIONS


TOP SPEED	205 M.P.H.
INITIAL RATE OF CLIMB	1450 F.P.M.
SERVICE CEILING	24,650 FT.
RANGE	695 MILES
FUEL CAPACITY	330 GAL.
POWER	2 - 600HP. PRATT & WHITNEY WASP

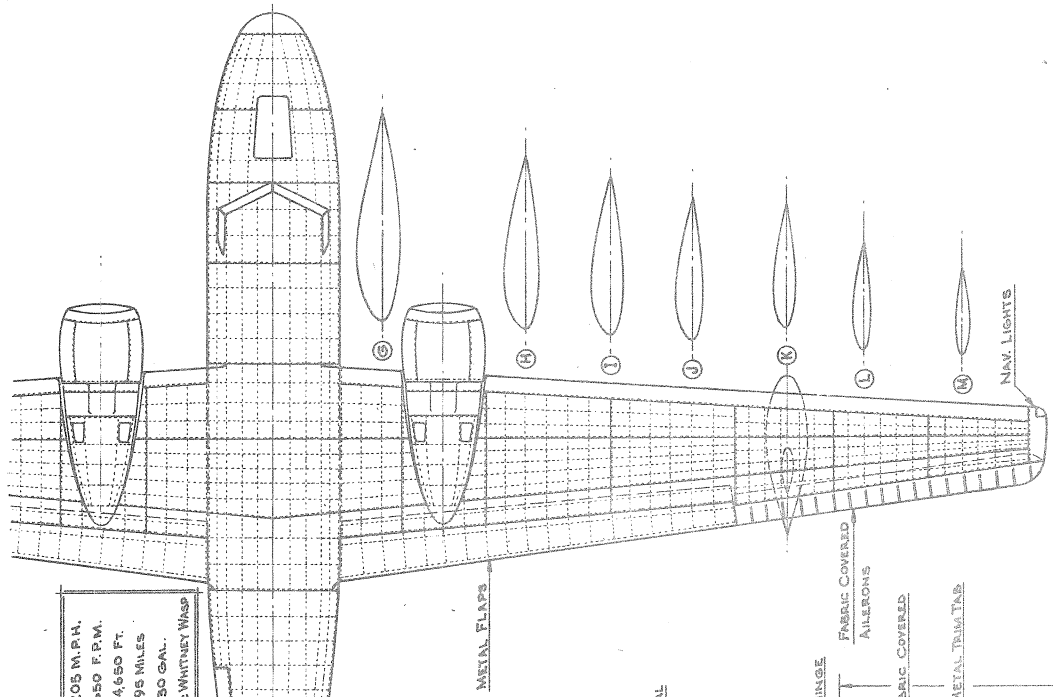

MAIN LANDING GEAR - SIDE VIEW

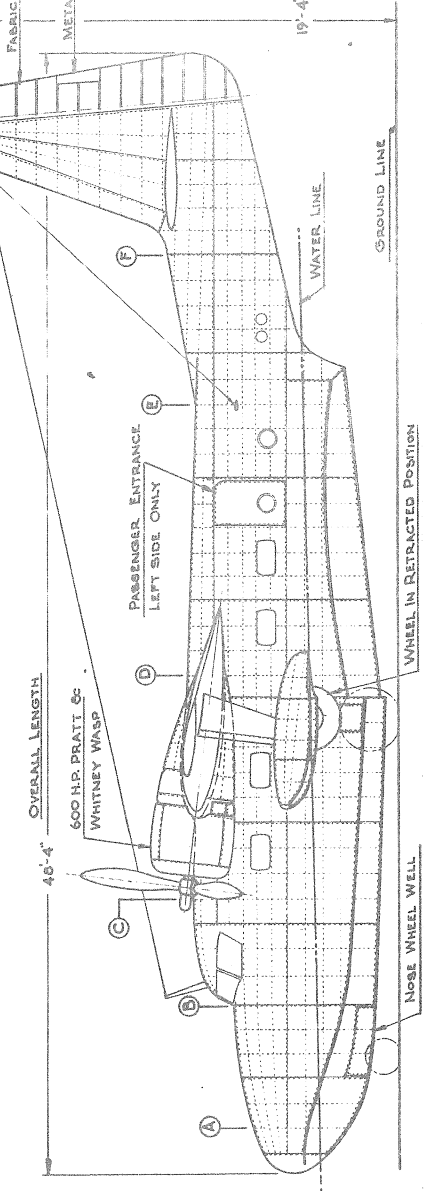

Grumman Mallard

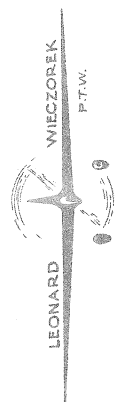

NOSE WHEEL WELL

WHEEL IN RETRACTED POSITION

GROUND LINE

WATER LINE

19'-4" HEIGHT

600 H.P. PRATT & WHITNEY WASP

PASSENGER ENTRANCE LEFT SIDE ONLY

WING FLOATS

F. RUDDER HINGE

FABRIC COVEREDAILERONS

METAL TRIM TAB

NAV. LIGHTS

METAL FLAPS

DIHEDRAL

PROPELLER, ARC

SPAN 66'-8"

W.L. 2

19'-9"

METAL TRIM TAB

FABRIC COVERED ELEVATORS

F. STAB HINGE